




NTN Bearing de Mexico, S.A.

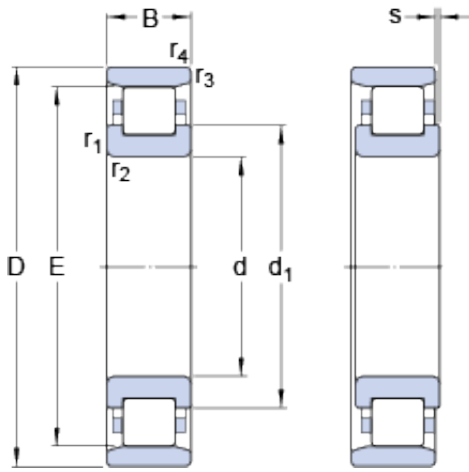

110 mm x 200 mm x 38 mm SKF N 222 ECP
thrust ball bearings

Bearing No. N 222 ECP

N 222 ECP Bearing 2D drawings and 3D CAD models

Size	200x110x38 mm
Bore Diameter	200 mm
Outer Diameter	110 mm
Width	38 mm
d	110 mm
D	200 mm
B	38 mm
d ₁	141 mm
E	180.5 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	2.1 mm
s	2.1 mm
d _a - min.	122 mm
d _a - max.	177 mm
D _a - min.	184 mm
D _a - max.	188 mm
r _a - max.	2 mm
r _b - max.	2 mm
Basic dynamic load rating - C	335 kN
Basic static load rating - C ₀	365 kN
Fatigue load limit - P _u	42.5 kN
Reference speed	3600 r/min
Limiting speed	4000 r/min
Calculation factor - k _r	0.12



NTN Bearing de Mexico, S.A.

Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	4.875
EAN	7316577108593
Product Group	B04144
Bore Profile	Straight
Cage Material	Polymer
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Outer Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity 2 Rib Inner Ring Plain Outer Ring Cage on Inner Ring OD
Long Description	110MM Bore; Straight Bore Profile; 200MM Outside Diameter; 38MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Outer Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium I
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing



NTN Bearing de Mexico, S.A.

Manufacturer URL	http://www.skf.com
Manufacturer Item Number	N 222 ECP
Weight / LBS	10.737
Bore	4.331 Inch 110 Millimeter
Outside Diameter	7.874 Inch 200 Millimeter
Width	1.496 Inch 38 Millimeter
bore diameter:	110 mm
precision rating:	RBEC 1 (ISO Class Normal)
outside diameter:	200 mm
maximum rpm:	4000 RPM
overall width:	38 mm
bearing material:	Steel
flanges:	(2) Inner Ring
cage material:	Polyamide
bore type:	Straight
finish/coating:	Uncoated
number of rows:	1
closure type:	Open
internal clearance:	C0
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
ring separation:	Separable Ring
outer ring width:	38 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	2 mm
dynamic load capacity:	335 kN
series:	N2
static load capacity:	365 kN
d ₁	141 mm
r _{1,2} min.	2.1 mm



NTN Bearing de Mexico, S.A.

$r_{3,4}$ min.	2.1 mm
s max.	2.1 mm
d_a min.	122 mm
d_a max.	177 mm
D_a min.	184 mm
D_a max.	188 mm
r_a max.	2 mm
r_b max.	2 mm
Basic dynamic load rating C	335 kN
Basic static load rating C_0	365 kN
Fatigue load limit P_u	42.5 kN
Calculation factor k_r	0.12
Limiting value e	0.2
Axial load factor Y	0.6
Mass bearing	4.79 kg